



EOOM8653-001

Introducing the “Elysian Oasis Collection”, inspired by the enchanting California desert. Our Elysian Oasis Collection offers a journey through vast landscapes where natural beauty flourishes. This new SPC vinyl flooring series captures the essence of the desert’s unique charm, featuring designs that reflect the serene oases and resilient plant life that bring joy and tranquility. With patterns that evoke the majesty of the desert, the Elysian Oasis Collection combines elegance and durability, providing a perfect blend of natural inspiration and modern functionality for your space.

SPECIFICATIONS

Construction	100% Waterproof GeoCore (SPC Composite)
Design	Wood
Plank Length	60 inches
Plank Width	9 inches
Plank Thickness	6.5 mm
Core Thickness	5 mm
Texture	Wood Grain Embossed
Sqft/Box	30.51 sq.ft
Wear Layer	20 mil
Edge Profile	Painted Bevel
Milling	Click Lock (Rapid Locking System)
Finish	UV Acrylic
Attached Pad	Y(1.5mm)
Certification	Green Guard Gold / Floorscore
Installation	Uniclic/Floating
Warranty	15 Year Residential / 7 Year Commercial



installation-friendly



maintenance-friendly



pet-friendly



waterproof



indentation resistance



sound tested



formaldehyde-free



phthalate-free



01 SANDSTONE WHISPER



02 OASIS MIRAGE



03 CANYON DUSK





04 DUNE BREEZE



05 PALM HAVEN




06 ROCKY RIDGE



Experience elegance and practicality with our Stone Polymer Composite (SPC) Vinyl Flooring. Featuring stunning imagery and diverse patterns, it combines the beauty of wood with industrial-grade strength. The rapid locking system ensures 50% greater stability, exceptional durability for high-traffic areas, and easy installation with no acclimation needed. SPC vinyl flooring is a lightweight, eco-friendly option that reduces building load. It is non-toxic, free of radioactive pollution, and provides excellent anti-slip performance. Available in designs like wood, stone, and carpet, SPC mimics natural patterns with high-grade materials, offering durability, stability, and heat resistance.


MOLDINGS




End Cap




Reducer




Wall Base

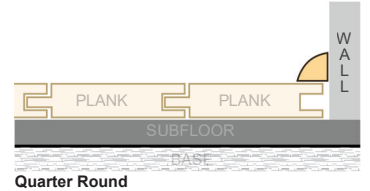

Quarter Round



T-Molding

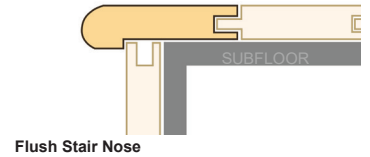

Flush Stair Nose

TESTING

Fire Rating	ASTM E648	Class 1
Coefficient of Friction	ASTM D2047	Standard Neolite 0.90
Static Load Limit	ASTM F970	0.005 in.
IIC-Impact Sound Rating	E492	59 db
STC-Sound Transmission Loss	E90	53 db
Overall Thickness	ASTM F387	0.264 in.
Average Wear Layer Thickness	ASTM F410	19.9 mil
Dimensional Stability, Curl After Heat	ASTM F2199	Passes
Residual Indentation, Surface Integrity	ASTM F1914	Passes
Resistance to Heat	ASTM F 1514	Passes
Resistance to Light	ASTM F1515	Passes
Floor Score Certified		Phthalate Free